▲SKYTEC TX510[™]

SINGLE USE EXAMINATION GLOVE, 100% NITRILE, POWDER FREE, 240MM LONG, 0.07MM THICK

High performance, powder-free, nitrile single use examination glove. Significantly stronger alternative to latex, dual certified (Industrial and Medical) and food safe.

FEATURES

- > High quality nitrile, soft and durable
- > Palm thickness 0.07mm (2.7 mil), weight: 3.5g size M
- Good resistance to penetration and projections of many chemicals
- > Textured finish on fingertips for improved grip and touch
- > Powder-free, latex free, non-sterile, AQL 1.5
- Chlorinated inside to offer more comfort and reduce friction when donning
- Antistatic properties due to inherent antistatic properties of nitrile
- > Approved for food handling
- > Dual labelling: PPE and medical
- Medical device compliant (MDD 93/42/EEC), conforms to EN455 (all parts) Tested against chemotherapy drugs according to ASTM D6978-05 Compliant with ASTM D6319-2019 and ASTM D5151-2019



SUITABLE FOR


Typical Industries

- Healthcare
- Electronics
- Food
- Pharmaceutical
- Manufacturing
- Oil and Gas
- Repair and Finishing

Suitable Applications

- Examination
- Food Handling
- Handling Oily Components
- Laboratory Analysis
- Light Assembly
- Paint Spraying

CERTIFICATION

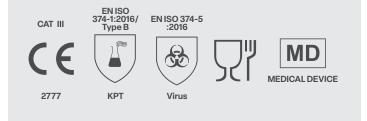

See overleaf for explanation



RECOMMENDATIONS FOR USE

risk of entanglement

suitable for its intended use

direct sunlight

USE: Single use glove. Not suitable for mechanical, thermal, heat, electrical, heavy chemical protection. Do not use near moving machines if there is a

STORAGE: Store in dry conditions in the original packaging and away from

CLEANING: To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present LIFETIME: Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is

∧SKYTEC TX510[™]

PRODUCTION INFORMATION

MATERIALS	LINER:	Nitrile
	COATING:	-
COLOUR	Blue	
LENGTH (mm)	240	
CUFF STYLE	Beaded	

ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS 7/S 8/M 9/L 10/XL 11/XXL	SKG00510DB SKG00510DD SKG00510DF SKG00510DH SKG00510DJ SKG00510DL	100 singles per box (90 singles on size XXL) 10 boxes per case

CERTIFICATION LEGENDS

Ethyl acetate

RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

ILDI.
CODE
A
В
С
D
E

G

Н

CHEMICAL	CODE
Methanol	J
Acetone	K
Acetonitrile	L
Dichloromethane	Μ
Carbon Disulfide	Ν
Toluene	0
Diethylamine	Р
Tetrahydrofurane	S

n-Heptane
Sodium hydroxide 40%
Sulphuric acid 96%
65% Nitric acid
99% Acetic acid
25% Ammonium hydroxic
30% Hydrogen peroxide
40% Hydrofluoric acid

CHEMICAL

37% F

Acetic acid
Ammonium hydroxide
lydrogen peroxide
lydrofluoric acid
ormaldehyde

OF ES	BREAKTHROUGH TIME
	≥30 min for at least 6 chemicals
	≥30 min for at least 3 chemicals
	≥10 min for at least 1 chemical

TYPE GLOV

Α

В

С



PROTECTION AGAINST MICRO-ORGANISMS EN 374-5



FOOD CONTACT DIRECTIVE 2002 / 72 EC

GLOBUS

EUROPE

www.globusgroup.com

- E: sales@globus.co.uk
- +44 (0)161 877 4747 T:
- +44 (0)161 877 4746 **F**:

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

- E: gcc@globusgroup.com
- T: +97148829962
- F: +97148829963

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by SATRA Technology Europe Limited. Bracetown Business Park. Clonee. D15 YN2P. Republic of Ireland. (Notified Body No. 2777)

www.globusgroup.com

GLOBUS AMERICAS

E: americas@globusgroup.com

© 2023 Globus (Shetland) Ltd | SKY-DATA-TX510-1223_1

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.

VIRUS = Glove has passed ISO 16604: 2004 (method B)